


| | | | | | |
|---------------------------------|---------------------------------------|-----------------------|------|------------------------------|--|
| Enclosure Type : PG 160 260 090 | | Size : 160 X 260 X 90 | | Weight : 1700 g. | |
| COVER | EEC03000 / A - Standard Grey | | BASE | EEC01400 / A - Standard Grey | |
| | EEC03000 / B - High visibility yellow | | | | |

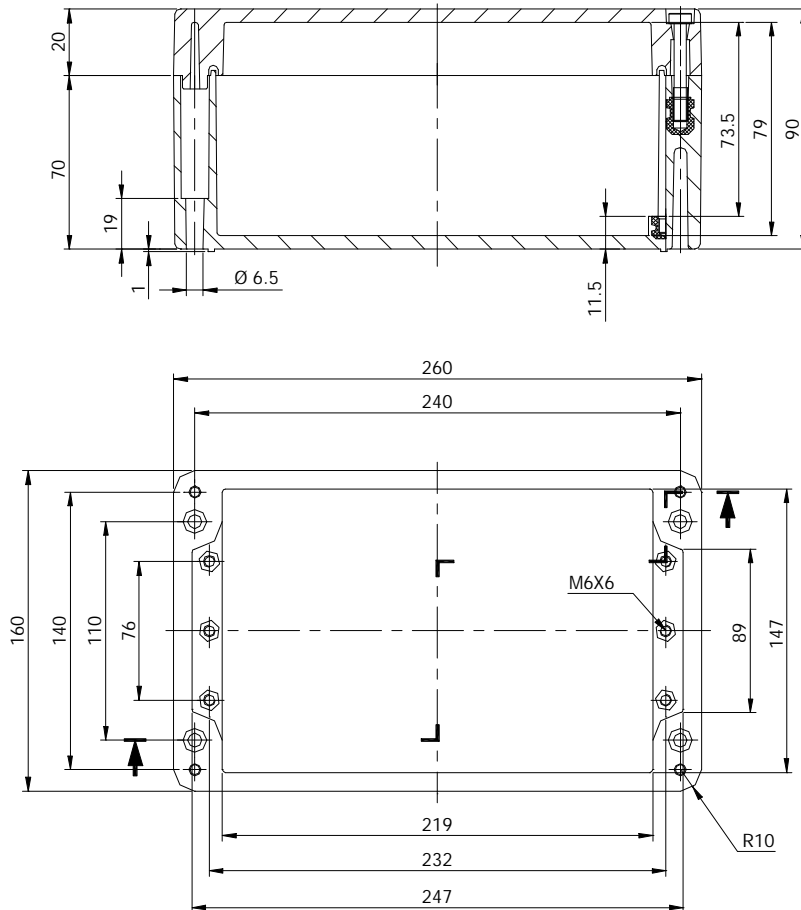

| CABLE GLANDS | | |
|--------------------------|---------|---------|
| Max. No. of cable glands | | |
| | AL | |
| CW | | DW |
| | BL | |
| PG | AL / BL | CW / DW |
| 7 | -- | -- |
| 9 | 26 | 8 |
| 11 | 16 | 6 |
| 13.5 | 15 | 6 |
| 16 | 12 | 4 |
| 21 | 6 | 3 |
| 29 | 4 | 2 |
| 36 | 3 | 1 |
| 42 | 3 | 1 |
| 48 | -- | -- |

| STD. ASSEMBLY PARTS | |
|---------------------|-----------|
| DESCRIPTION | ORDER No. |
| S.S Cover Screw | EEN02900 |
| Std. C/R Gasket | EEN03402 |
| Alt. Silicon Gasket | EEN04902 |

| ACCESSORIES | |
|------------------------|----------|
| TERMINAL RAIL | |
| TS 32 | EEN00304 |
| TS 35 | EEN00204 |
| MOUNTING PLATE - (M.P) | |
| M.P 1.5mm thick | EEN01500 |
| M.P Screw Kit | EAA03300 |
| M.P Spacer Kit | EAA03400 |

| MOUNTING BRACKET KIT | |
|----------------------|----------|
| Polyamide | EAA00400 |
| Stainless steel | EAA03200 |

| HINGE ASSEMBLY KIT | |
|--------------------|----------|
| Polyamide | EAA00700 |
| Stainless Steel | EAA03500 |

| ASSEMBLY WITH TERMINALS | | | | | | | | | | | | | | | | | |
|--|------------|-------|---------|--------|--------|---------|-------|-----------------------------|--------|--------|--------|----------|--------|--------|---------|--------|--------|
| Length of DIN Rail 245mm | | | | | | | | Maximum Rail capacity 228mm | | | | | | | | | |
| Terminal Blocks | WEIDMULLER | | | | | | | | | | | PHOENIX | | | | | |
| | SAK 2.5 | SAK 4 | SAK 6 N | SAK 16 | SAK 35 | WDU 2.5 | WDU 4 | WDU 6 | WDU 10 | WDU 16 | WDU 35 | UK 2.5 B | UK 5 N | UK 6 N | UK 10 N | UIK 16 | UIK 35 |
| Technical Information | | | | | | | | | | | | | | | | | |
| Single Wire cross section (mm ²) | 2.5 | 4 | 6 | 16 | 35 | 2.5 | 4 | 6 | 10 | 16 | 35 | 4 | 6 | 10 | 16 | 25 | 35 |
| Fine Wire cross section (mm ²) | 2.5 | 4 | 6 | 16 | 35 | 2.5 | 4 | 6 | 10 | 16 | 35 | 2.5 | 4 | 6 | 10 | 16 | 35 |
| Nominal Volts (V) | 550 | 418 | 418 | 726 | 726 | 660 | 660 | 660 | 660 | 660 | 660 | 690 | 800 | 800 | 800 | 400 | 800 |
| Load (Amps.) | 15 | 21 | 26 | 47 | 75 | 26 | 35 | 46 | 63 | 85 | 138 | 32 | 41 | 57 | 76 | 101 | 125 |
| Width of Terminals (mm) | 6 | 6.5 | 8 | 12 | 16 | 5 | 6 | 8 | 10 | 12 | 16 | 6.2 | 6.2 | 8.2 | 10.2 | 12.2 | 15.2 |
| Max. no of Terminals in Rail - TS 32 | 36 | 32 | 26 | 18 | 12 | -- | -- | -- | -- | -- | -- | 34 | 34 | 26 | 20 | 16 | 14 |
| Max. no of Terminals in Rail - TS 35 | -- | -- | -- | -- | -- | 42 | 36 | 26 | 20 | 18 | 12 | | | | | | |
| Max. no of Terminal rails possible | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |